


CORNER SIGHT DISTANCE

DESIGN 85 th PERCENTILE SPEED	SD
25	275
30	330
35	385
40	440
45	495
50	550

SET BACK FROM EDGE OF TRAVEL WAY

① Driver set back = 10' + Y but not less than 15'

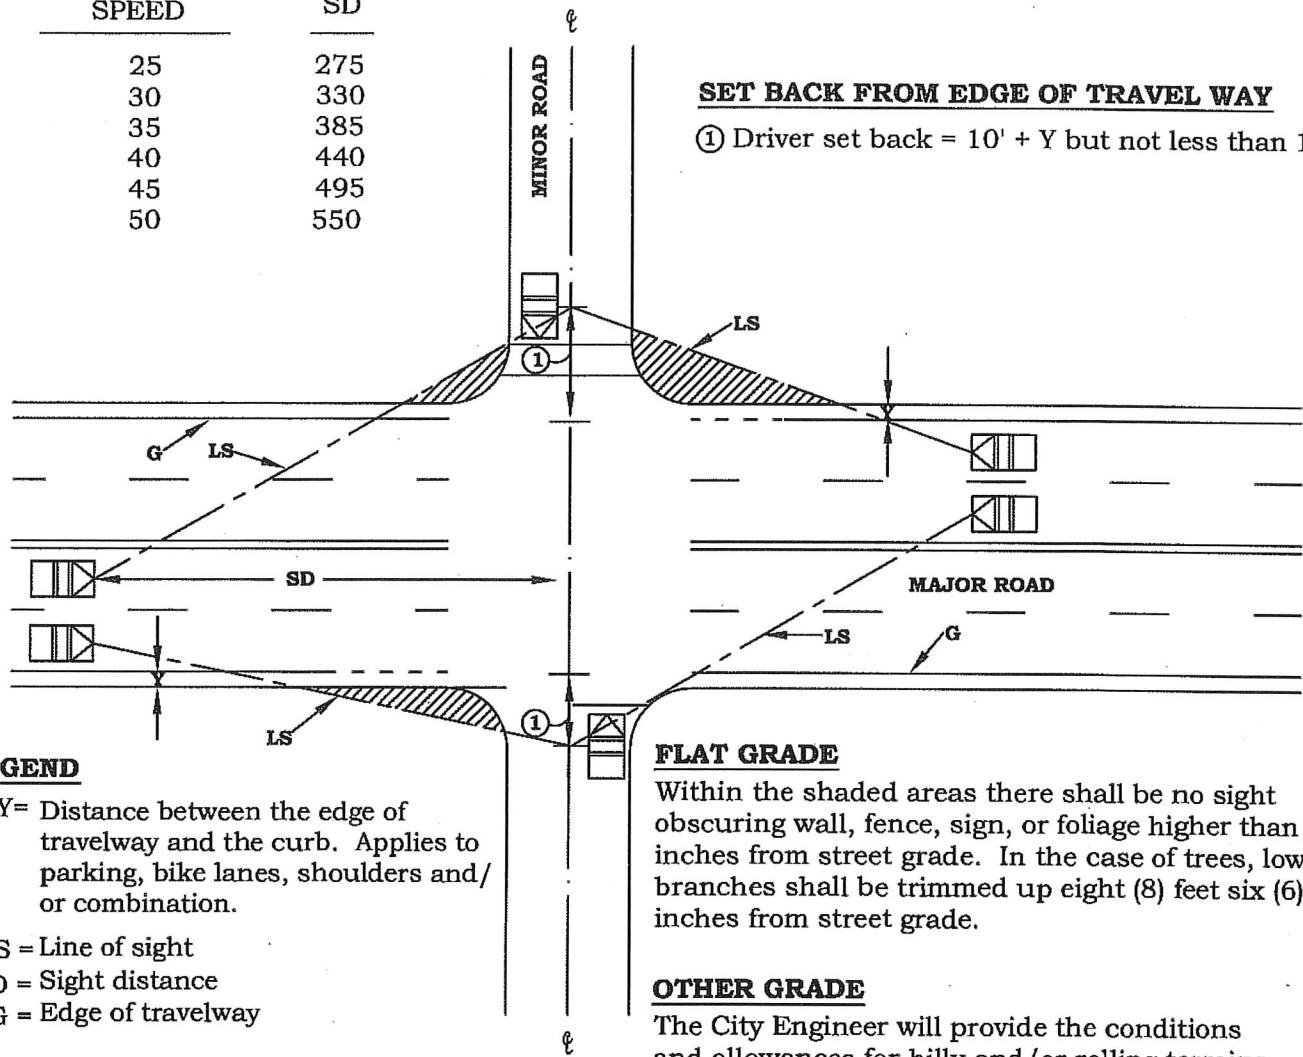

LEGEND

Y = Distance between the edge of travelway and the curb. Applies to parking, bike lanes, shoulders and/or combination.

LS = Line of sight

SD = Sight distance


G = Edge of travelway

FLAT GRADE

Within the shaded areas there shall be no sight obscuring wall, fence, sign, or foliage higher than 42 inches from street grade. In the case of trees, lower branches shall be trimmed up eight (8) feet six (6) inches from street grade.

OTHER GRADE

The City Engineer will provide the conditions and allowances for hilly and/or rolling terrains.

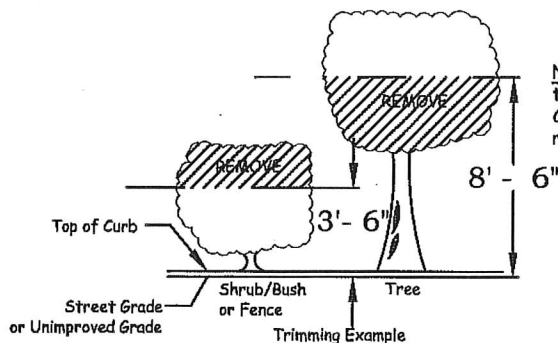

Note: Street trees shall be trimmed by City staff only. Call 408-777-3269 to request service.

Note: If no curb/gutter exist, the measurement is 3' from existing grade.

CONTROLLED INTERSECTIONS